



Example Network Architecture

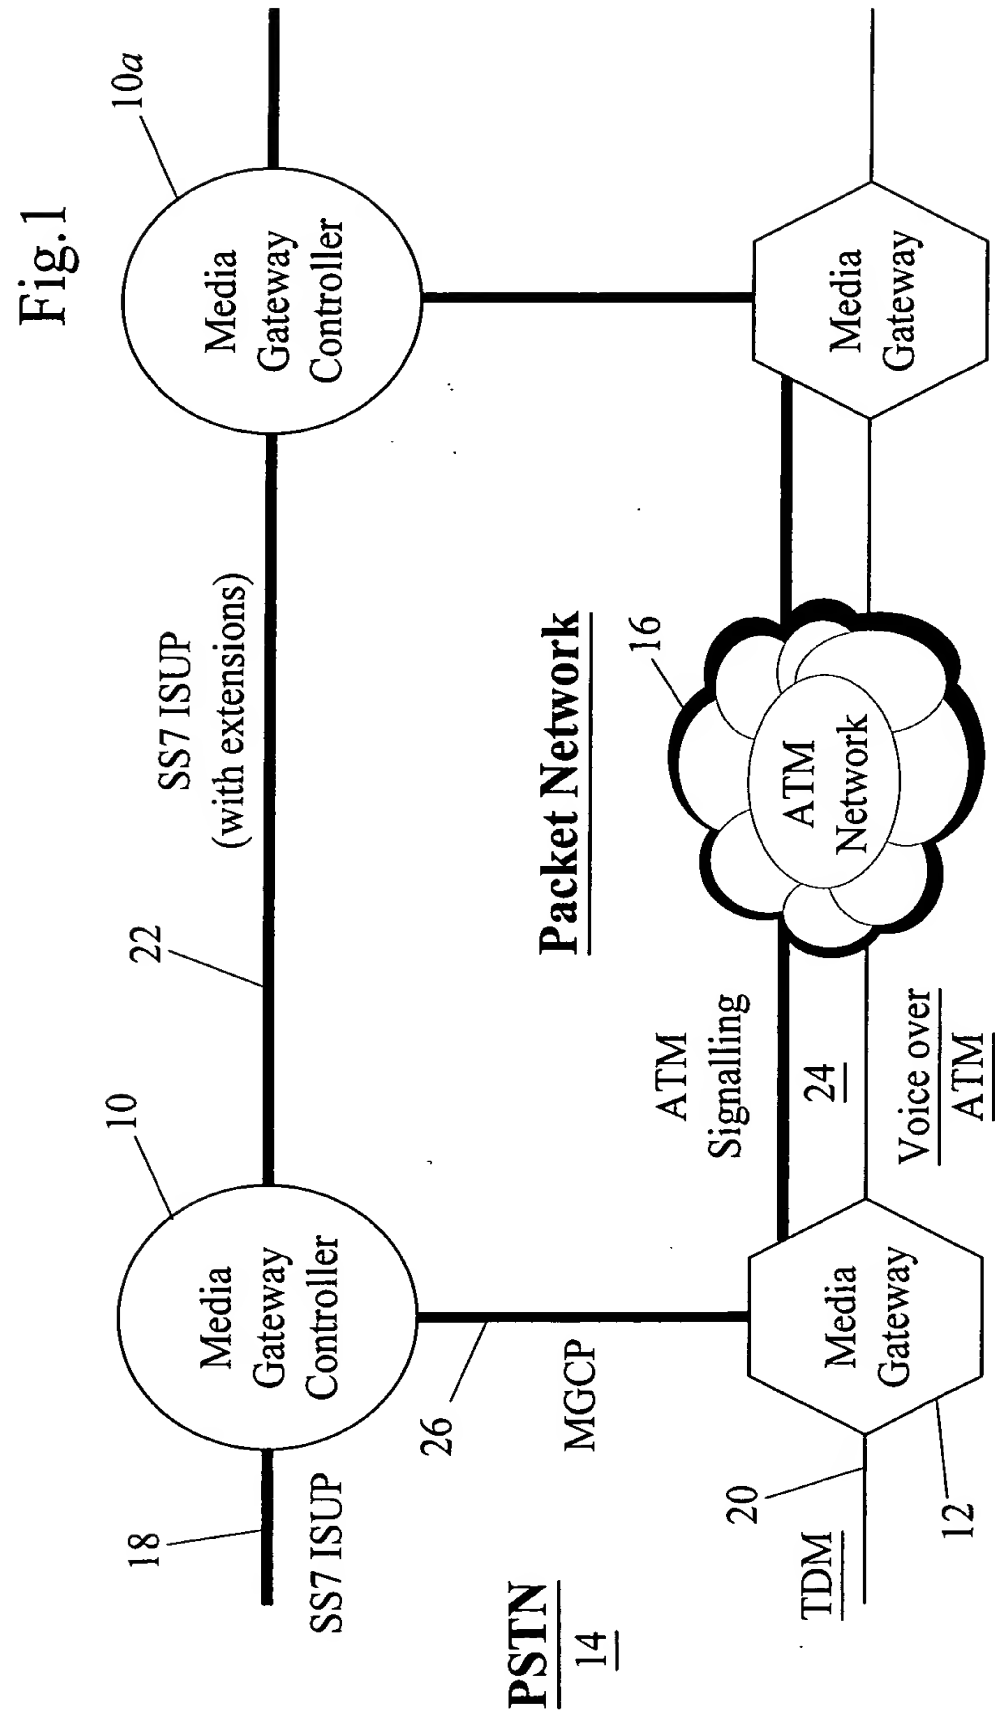

Initial Call Setup messages (PSTN-originated call)

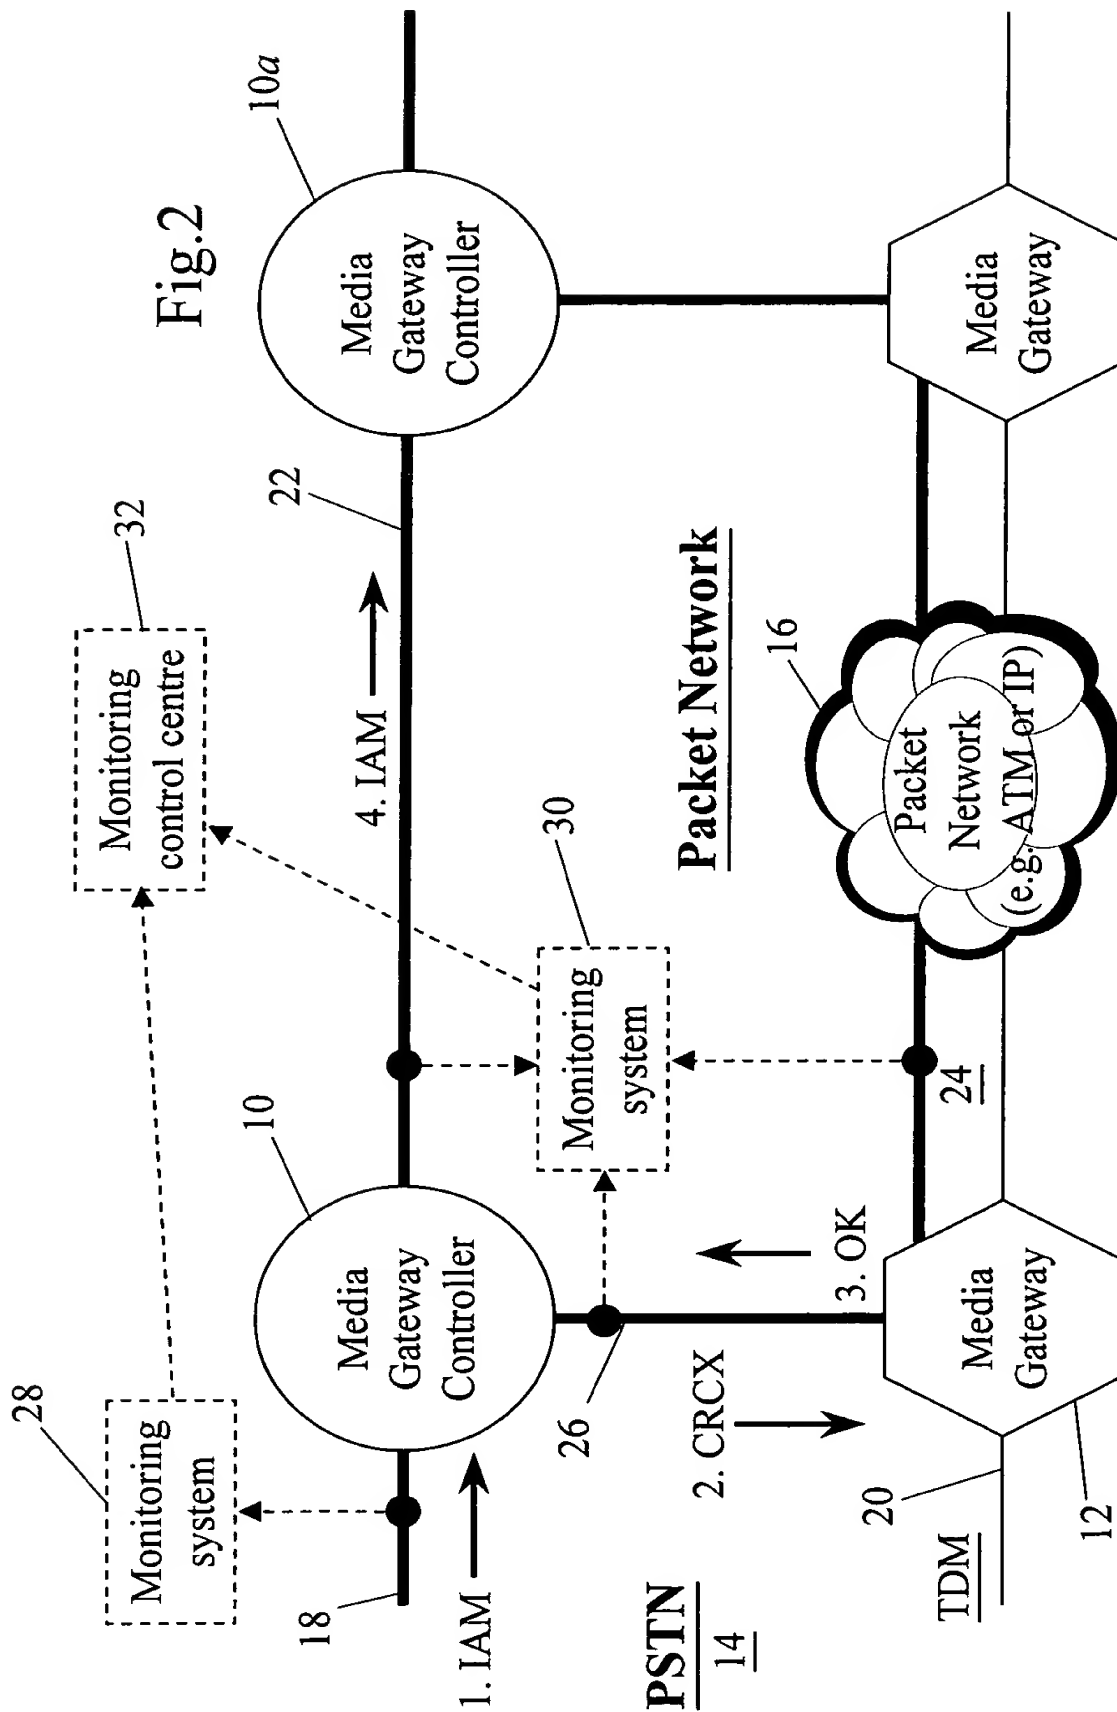

Parameters used to correlate between messages

- | | | | |
|---|------|---|--|
| 1 | IAM | > | [Calling, called], [OPC,DPC,CIC] |
| 2 | CRCX | > | [endpointname], [Transaction id] |
| 3 | OK | > | [Transaction Id], [Connection Descriptor] |
| 4 | IAM | > | [Calling,Called] , [Connection Descriptor] |